Lauritz Knudsen

Electrical & Automation

POWERING
A NON-STOP INDIA



Maximum Retail Prices
For Final Distribution Products
Effective from 15-08-26

EXORA

©2026. ALL RIGHTS RESERVED

Lauritz Knudsen
Electrical & Automation

AT LAURITZ KNUDSEN, WE POWER A NON-STOP INDIA.

That's why we listen, we partner, and we innovate - to make technology and energy solutions accessible to every corner of India.

Born of this soil - we understand India's rhythm and resilience.

Therefore, **we create technology that speaks every language of progress.** From farms to factories, we empower every business, regardless of size, sector, or location, to thrive.


Because when technology reaches everyone, India moves forward as one.

EXORA

Lauritz Knudsen Electrical & Automation Final Distribution Products

Lauritz Knudsen's Exora range of modular devices offer MCB, RCCB, Isolator & DB for final distribution of electrical power. Lauritz Knudsen's products are better known for reliability, functionality & ease of use.



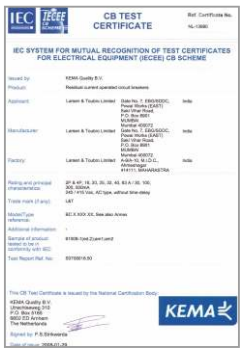



Lauritz Knudsen products conform to relevant global standards viz. IEC, EN.
They also have BIS, CE marking, CB and KEMA certification.

Contents

MCB - Miniature Circuit Breaker 2

Isolators, RCCBs 6

RCBOs - Residual Current Breaker with Overcurrent Protrection 8

Other Protection & Control Devices 9

Industrial Plugs & Sockets 11

Distribution Boards 12













Note:
[Black colour : HSN code]
Current GST 18%, subject to changes as per Govt. notification


IST | IEC | CE | KEMA | EN



Lauritz Knudsen Final Distribution Products - the assurance of absolute safety



Safety re-defined
Finger proof terminals eliminate chances of accidental contact with live part. You can install, operate and maintain modular device with total confidence.




Energy limiting class - 3
If fault occurs, the Rapid Arc Quenching mechanism in modular device operates and extinguishes the arc quickly (within 3-5 msec), ensuring lowest possible energy flow through the circuit. This minimize risk of fire and maximizes life of your equipment.



Safety meets superior aesthetics
Ergonomically designed, profiled for superior cooling and manufactured with fire retardant material. Modular device is brought to you keeping in mind utmost user safety.

Key Benefits




True contact indication
E&A modular device range enhances safety through true contact indication even from a distance regardless of its mounting and knob position. Red and Green indication tags provided below the knob positively identify the electrical ON/OFF status, reflecting actual contact status.





Integrated label holder
E&A MCBs are equipped with label holder for easy identification of circuit during operation as well as in maintenance.





Innovatively profiled breathing channels
When two or more poles are placed adjacent to each other, the breathing channels are so profiled that the air circulates around individual pole, resulting in cooler operation.





Large terminal size and Biconnect
Exora MCB's can easily accommodate cables of up to 35 sq.mm. Biconnect terminals offer convenience of connecting both cable and bus bar.





Two position DIN rail clip
Installation on a DIN rail is further simplified with a two-position DIN rail clip as a standard feature. E&A MCB range makes mounting on a standard DIN rail more convenient .



Non-welding contacts
Silver Graphite contact tips ensure higher life and maximum safety against contact welding due to its superior anti-welding properties, enhancing safety and life of the system.





Combihead screw
E&A modular devices with combihead screws, allow you to use standard as well as Philips head screw drivers. E&A modular device range addresses your undefined needs.



Miniature Circuit Breaker (MCB) [8536]

Range Highlights

- True contact indication for individual pole
- Label holder facility for all configurations
- Conforms to IS/IEC 60898 - 10kA
- Conforms to IS/IEC 60947 - 2
  - » 15kA C-curve till 40 A
  - » 10kA C-curve for 50A, 63A
- Available in B, C & D curves
- Low watt loss - almost 50% of the values prescribed by IS/IEC 60898
- Trip free mechanism
- Design based on advanced current limiting hammer trip mechanism
- No Line-Load bias
- Bi connect feature on both sides
- Suitable for accessory fitment







Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)							
0.5A	1	-	-	BB10E50C	640	BB10E50D	665
1A	1	-	-	BB10010C	640	BB10010D	665
2A	1	-	-	BB10020C	640	BB10020D	665
3A	1	-	-	BB10030C	640	BB10030D	665
4A	1	-	-	BB10040C	640	BB10040D	665
6A	1	BB10060B	377	BB10060C	377	BB10060D	545
10A	1	BB10100B	377	BB10100C	377	BB10100D	545
16A	1	BB10160B	377	BB10160C	377	BB10160D	545
20A	1	BB10200B	377	BB10200C	377	BB10200D	545
25A	1	BB10250B	377	BB10250C	377	BB10250D	545
32A	1	BB10320B	377	BB10320C	377	BB10320D	545
40A	1	BB10400B	940	BB10400C	940	BB10400D	960
50A	1	BB10500B	940	BB10500C	940	BB10500D*	960
63A	1	BB10630B	940	BB10630C	940	BB10630D*	960
Double Pole (DP)							
0.5A	2	-	-	BB20E50C	1870	BB20E50D	1905
1A	2	-	-	BB20010C	1870	BB20010D	1905
2A	2	-	-	BB20020C	1870	BB20020D	1905
3A	2	-	-	BB20030C	1870	BB20030D	1905
4A	2	-	-	BB20040C	1870	BB20040D	1905
6A	2	BB20060B	1305	BB20060C	1305	BB20060D	1385
10A	2	BB20100B	1305	BB20100C	1305	BB20100D	1385
16A	2	BB20160B	1305	BB20160C	1305	BB20160D	1385
20A	2	BB20200B	1305	BB20200C	1305	BB20200D	1385
25A	2	BB20250B	1305	BB20250C	1305	BB20250D	1385
32A	2	BB20320B	1305	BB20320C	1305	BB20320D	1385
40A	2	BB20400B	2125	BB20400C	2125	BB20400D	2260
50A	2	BB20500B	2125	BB20500C	2125	BB20500D*	2260
63A	2	BB20630B	2125	BB20630C	2125	BB20630D*	2260
Three Pole (TP)							
0.5A	3	-	-	BB30E50C	2725	BB30E50D	2765
1A	3	-	-	BB30010C	2725	BB30010D	2765
2A	3	-	-	BB30020C	2725	BB30020D	2765
3A	3	-	-	BB30030C	2725	BB30030D	2765
4A	3	-	-	BB30040C	2725	BB30040D	2765
6A	3	BB30060B	2055	BB30060C	2055	BB30060D	2205
10A	3	BB30100B	2055	BB30100C	2055	BB30100D	2205
16A	3	BB30160B	2055	BB30160C	2055	BB30160D	2205
20A	3	BB30200B	2055	BB30200C	2055	BB30200D	2205
25A	3	BB30250B	2055	BB30250C	2055	BB30250D	2205
32A	3	BB30320B	2055	BB30320C	2055	BB30320D	2205
40A	3	BB30400B	3200	BB30400C	3200	BB30400D	3415
50A	3	BB30500B	3200	BB30500C	3200	BB30500D*	3415
63A	3	BB30630B	3200	BB30630C	3200	BB30630D*	3415

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

*For details, please contact nearest branch office

Miniature Circuit Breaker (MCB) [8536]



Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Four Pole (FP)							
0.5A	4	-	-	BB40E50C	3460	BB40E50D	3465
1A	4	-	-	BB40010C	3460	BB40010D	3465
2A	4	-	-	BB40020C	3460	BB40020D	3465
3A	4	-	-	BB40030C	3460	BB40030D	3465
4A	4	-	-	BB40040C	3460	BB40040D	3465
6A	4	BB40060B	2875	BB40060C	2875	BB40060D	3000
10A	4	BB40100B	2875	BB40100C	2875	BB40100D	3000
16A	4	BB40160B	2875	BB40160C	2875	BB40160D	3000
20A	4	BB40200B	2875	BB40200C	2875	BB40200D	3000
25A	4	BB40250B	2875	BB40250C	2875	BB40250D	3000
32A	4	BB40320B	2875	BB40320C	2875	BB40320D	3000
40A	4	BB40400B	4030	BB40400C	4030	BB40400D	4435
50A	4	BB40500B	4030	BB40500C	4030	BB40500D*	4435
63A	4	BB40630B	4030	BB40630C	4030	BB40630D*	4435

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.
*For details, please contact nearest branch office

MCBs (Miniature Circuit Breakers) : 80A-125A [8536]

Range Highlights

- Short circuit Breaking Capacity - 15kA (IS/IEC 60947-2, EN 60947-2)
- C & D Characteristics
- Available in SP, DP, TP and FP
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories









Rating	Modules 1 Mod = 17.5 mm	C Curve Cat. No.	M.R.P. (₹) Per Unit	D Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)					
80A	1.5	AU15S10803C	3980	AU15S10803D	4530
100A	1.5	AU15S11003C	4460	AU15S11003D	5065
125A	1.5	AU15S11253C	4800	AU15S11253D	5475
Double Pole (DP)					
80A	3	AU15S20803C	8815	AU15S20803D	10035
100A	3	AU15S21003C	9400	AU15S21003D	10690
125A	3	AU15S21253C	10345	AU15S21253D	11760
Three Pole (TP)					
80A	4.5	AU15S30803C	13905	AU15S30803D	15835
100A	4.5	AU15S31003C	14835	AU15S31003D	16860
125A	4.5	AU15S31253C	16460	AU15S31253D	18705
Four Pole (FP)					
80A	6	AU15S40803C	18165	AU15S40803D	20630
100A	6	AU15S41003C	18895	AU15S41003D	21495
125A	6	AU15S41253C	21400	AU15S41253D	24320



Solar Combo MCBs [8536]

(AC MCB + DC MCB)



AC MCB^ with C-Curve

Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
1 AC 16A DP MCB^ + 1 DC 16A DP 500V MCB	2+2	**SC221616**	**2015**
New 1 AC 20A DP MCB^ + 1 DC 20A DP 500V MCB	2+2	**SC222020**	**2015**
New 1 AC 20A DP MCB^ + 1 DC 25A DP 500V MCB	2+2	**SC222025**	**2015**
New 1 AC 20A DP MCB^ + 1 DC 32A DP 500V MCB	2+2	**SC222032**	**2015**
1 AC 25A DP MCB^ + 1 DC 16A DP 500V MCB	2+2	**SC222516**	**2015**
New 1 AC 25A DP MCB^ + 1 DC 25A DP 500V MCB	2+2	**SC222525**	**2015**
1 AC 32A DP MCB^ + 1 DC 16A DP 500V MCB	2+2	**SC223216**	**2015**
New 1 AC 32A DP MCB^ + 1 DC 25A DP 500V MCB	2+2	**SC223225**	**2015**
1 AC 32A DP MCB^ + 1 DC 32A DP 500V MCB	2+2	**SC223232**	**2015**



DC MCBs as per IEC 60947-2 [8536]

Rated Voltage:
Breaking capacity of 6 kA - BB Series DC MCBs



130V DC SP MCB

Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BB10E5DC	910
1A	1	BB1001DC	910
2A	1	BB1002DC	910
3A	1	BB1003DC	910
4A	1	BB1004DC	910
6A	1	BB1006DC	790
10A	1	BB1010DC	790
16A	1	BB1016DC	790
20A	1	BB1020DC	790
25A	1	BB1025DC	790
32A	1	BB1032DC	790
40A	1	BB1040DC	1040
50A	1	BB1050DC	1040
63A	1	BB1063DC	1040

Rated Voltage:
Breaking capacity of BJ Series DC MCBs
» 10kA till 40 A
» 6kA for 50A, 63A

250V DC SP MCB

Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BJ10E5DC	1070
1A	1	BJ1001DC	1070
2A	1	BJ1002DC	1070
3A	1	BJ1003DC	1070
4A	1	BJ1004DC	1070
6A	1	BJ1006DC	875
10A	1	BJ1010DC	875
16A	1	BJ1016DC	875
20A	1	BJ1020DC	875
25A	1	BJ1025DC	875
32A	1	BJ1032DC	875
40A	1	BJ1040DC	1210
New 50A	1	BJ1050DC	1210
63A	1	BJ1063DC	1210



250V DC DP MCB

0.5A	2	BB20E5DC	1950
1A	2	BB2001DC	1950
2A	2	BB2002DC	1950
3A	2	BB2003DC	1950
4A	2	BB2004DC	1950
6A	2	BB2006DC	1715
10A	2	BB2010DC	1715
16A	2	BB2016DC	1715
20A	2	BB2020DC	1715
25A	2	BB2025DC	1715
32A	2	BB2032DC	1715
40A	2	BB2040DC	2320
50A	2	BB2050DC	2320
63A	2	BB2063DC	2320

500V DC DP MCB

0.5A	2	BJ20E5DC	2230
1A	2	BJ2001DC	2230
2A	2	BJ2002DC	2230
3A	2	BJ2003DC	2230
4A	2	BJ2004DC	2230
6A	2	BJ2006DC	1885
10A	2	BJ2010DC	1885
16A	2	BJ2016DC	1885
20A	2	BJ2020DC	1885
25A	2	BJ2025DC	1885
32A	2	BJ2032DC	1885
40A	2	BJ2040DC	2400
New 50A	2	BJ2050DC	2400
63A	2	BJ2063DC	2400

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos.

1000V DC MCBs [8536]

Rated Voltage:1000V DC
with breaking capacity of 6 kA - BK Series DC MCBs

New



Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
DP 6A 1000V DC 6kA MCB	4	BK2006DC	2875
DP 10A 1000V DC 6kA MCB	4	BK2010DC	2875
DP 16A 1000V DC 6kA MCB	4	BK2016DC	2875
DP 20A 1000V DC 6kA MCB	4	BK2020DC	2875
DP 25A 1000V DC 6kA MCB	4	BK2025DC	2875
DP 32A 1000V DC 6kA MCB	4	BK2032DC	2875
DP 40A 1000V DC 6kA MCB	4	BK2040DC	3495
DP 50A 1000V DC 6kA MCB	4	BK2050DC	3495
DP 63A 1000V DC 6kA MCB	4	BK2063DC	3495

Isolators [8536]





Range Highlights
- Conforms to IEC 60947-3
- Utilization category AC-22A
- Available in DP, TP and FP versions in 40A, 63A, 80A & 100A ratings

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
	Double Pole (DP)				Three Pole (TP)		Four Pole (FP)		
40A	2	**BF204000**	**915**	3	**BF304000**	**1585**	4	**BF404000**	**2030**
63A	2	**BF206300**	**1160**	3	**BF306300**	**1825**	4	**BF406300**	**2125**
80A	2	**BF208000**	**1480**	3	**BF308000**	**2000**	4	**BF408000**	**2375**
100A	2	**BF210000**	**1550**	3	**BF310000**	**2135**	4	**BF410000**	**2570**

Note: Standard Pack Quantity for Isolator : DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

RCCB (Residual Current Circuit Breaker) [8536]



Range Highlights
- Conforms to IS 12640 (Part 1) / IEC 61008-1
- RCCBs are available in DP and FP versions from 25 to 100A ratings with 30 mA, 100 mA and 300mA sensitivity



- Truly current operated - operation even at nominal Voltage
- Operates on Core Balance Current Transformer (CBCT) principle
- Advanced neutral mechanism

Rating	Sensitivity	Modules 1 Mod =17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
	Double Pole (DP)			
25A	30 mA	2	**BG202503**	**4180**
	100 mA	2	**BG202510**	**4685**
	300 mA	2	**BG202530**	**4685**
New 32A	30 mA	2	**BG203203**	**4780**
	100 mA	2	**BG203210**	**5355**
	300 mA	2	**BG203230**	**5355**
40A	30 mA	2	**BG204003**	**4780**
	100 mA	2	**BG204010**	**5355**
	300 mA	2	**BG204030**	**5355**
63A	30 mA	2	**BG206303**	**5960**
	100 mA	2	**BG206310**	**6455**
	300 mA	2	**BG206330**	**6455**
100A	30 mA	2	**BG210003**	**10705**
	100 mA	2	**BG210010**	**11245**
	300 mA	2	**BG210030**	**11245**

Rating	Sensitivity	Modules 1 Mod =17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
	Four Pole (FP)			
25A	30 mA	4	**BG402503**	**5860**
	100 mA	4	**BG402510**	**6135**
	300 mA	4	**BG402530**	**6135**
New 32A	30 mA	4	**BG403203**	**5920**
	100 mA	4	**BG403210**	**6240**
	300 mA	4	**BG403230**	**6240**
40A	30 mA	4	**BG404003**	**5920**
	100 mA	4	**BG404010**	**6240**
	300 mA	4	**BG404030**	**6240**
63A	30 mA	4	**BG406303**	**6690**
	100 mA	4	**BG406310**	**7155**
	300 mA	4	**BG406330**	**7155**
100A	30 mA	4	**BG410003**	**11665**
	100 mA	4	**BG410010**	**12095**
	300 mA	4	**BG410030**	**12095**

RCCBs (Residual Current Circuit Breakers) : Type-Adi (with Added immunity) [8536]




Range Highlights
- Wide Range of Current Ratings - 25A to 100A
- Precise Sensitivities for variety of applications - from 30mA to 300mA
- 2P & 4P versions
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories
- Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
	2P Adi			
25A	30mA	2	**AURAD202503**	**7945**
	100mA	2	**AURAD202510**	**8310**
	300mA	2	**AURAD202530**	**8310**
40A	30mA	2	**AURAD204003**	**8430**
	100mA	2	**AURAD204010**	**8565**
	300mA	2	**AURAD204030**	**8565**
63A	30mA	2	**AURAD206303**	**9860**
	100mA	2	**AURAD206310**	**10050**
	300mA	2	**AURAD206330**	**10050**
100A	30mA	2	**AURAD210003**	**14570**

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
	4P Adi			
25A	30mA	4	**AURAD402503**	**9605**
	100mA	4	**AURAD402510**	**9785**
	300mA	4	**AURAD402530**	**9785**
40A	30mA	4	**AURAD404003**	**9975**
	100mA	4	**AURAD404010**	**10130**
	300mA	4	**AURAD404030**	**10130**
63A	30mA	4	**AURAD406303**	**10860**
	100mA	4	**AURAD406310**	**11085**
	300mA	4	**AURAD406330**	**11085**
100A	30mA	4	**AURAD410003**	**17300**
	300mA	4	**AURAD410030**	**17300**

All-Rounder RCDs
(RCCB & RCBO)

Specially designed Adi RCDs ensure Safe and Reliable protection
for All Applications in AC networks with Pulsating DC along with Harmonics



Added Immunity

RCBOs (Residual Current Breaker with Overcurrent Protection) [8536]

Range Highlights*

- Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- Short circuit Breaking Capacity - 10kA
- Precise Sensitivities for a variety of applications
  - » from 10mA to 300mA
- Suitable for Isolation



- Availability of wide Range of Site Mountable Accessories
- Available in
  - » Type AC: For standard AC installations
  - » Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC#				
6A	10mA	2	**AUF3C200601**	**7115**
	30mA	2	**AUF3C200603**	**7115**
	100mA	2	**AUF3C200610**	**7260**
	300mA	2	**AUF3C200630**	**7345**
10A	10mA	2	**AUF3C201001**	**7115**
	30mA	2	**AUF3C201003**	**7115**
	100mA	2	**AUF3C201010**	**7260**
	300mA	2	**AUF3C201030**	**7345**
16A	10mA	2	**AUF3C201601**	**7115**
	30mA	2	**AUF3C201603**	**7115**
	100mA	2	**AUF3C201610**	**7260**
	300mA	2	**AUF3C201630**	**7345**
20A	30mA	2	**AUF3C202003**	**7115**
	100mA	2	**AUF3C202010**	**7260**
	300mA	2	**AUF3C202030**	**7345**
25A	30mA	2	**AUF3C202503**	**7115**
	100mA	2	**AUF3C202510**	**7260**
	300mA	2	**AUF3C202530**	**7345**
32A	30mA	2	**AUF3C203203**	**7115**
	100mA	2	**AUF3C203210**	**7260**
	300mA	2	**AUF3C203230**	**7345**
40A	30mA	2	**AUF3C204003**	**7115**
	100mA	2	**AUF3C204010**	**7260**
	300mA	2	**AUF3C204030**	**7345**
63A	30mA	4	**AUF3C206303**	**8610**
	100mA	4	**AUF3C206310**	**9130**
	300mA	4	**AUF3C206330**	**9200**
4P AC				
16A	30mA	7.5	**AUF3C401603**	**7780**
	100mA	7.5	**AUF3C401610**	**8660**
	300mA	7.5	**AUF3C401630**	**8835**
20A	30mA	7.5	**AUF3C402003**	**7780**
	100mA	7.5	**AUF3C402010**	**8660**
	300mA	7.5	**AUF3C402030**	**8835**
25A	30mA	7.5	**AUF3C402503**	**7780**
	100mA	7.5	**AUF3C402510**	**8660**
	300mA	7.5	**AUF3C402530**	**8835**
32A	30mA	7.5	**AUF3C403203**	**8035**
	100mA	7.5	**AUF3C403210**	**8665**
	300mA	7.5	**AUF3C403230**	**8860**
40A	30mA	7.5	**AUF3C404003**	**8160**
	100mA	7.5	**AUF3C404010**	**8665**
	300mA	7.5	**AUF3C404030**	**8890**
63A	30mA	7.5	**AUF3C406303**	**9780**
	100mA	7.5	**AUF3C406310**	**9965**
	300mA	7.5	**AUF3C406330**	**9965**
80A	30mA	12	**AUF3C408003**	**37895**
	100mA	12	**AUF3C408010**	**38745**
	300mA	12	**AUF3C408030**	**38745**
100A	30mA	12	**AUF3C410003**	**40515**
	100mA	12	**AUF3C410010**	**41485**
	300mA	12	**AUF3C410030**	**41485**

#For 2P AC/Adi D Curve RCBO, please contact nearest branch office

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
6A	30mA	2	**AUF3D200603**	**9600**
	100mA	2	**AUF3D200610**	**10575**
	300mA	2	**AUF3D200630**	**10970**
10A	30mA	2	**AUF3D201003**	**9600**
	100mA	2	**AUF3D201010**	**10575**
	300mA	2	**AUF3D201030**	**10970**
16A	30mA	2	**AUF3D201603**	**9600**
	100mA	2	**AUF3D201610**	**10575**
	300mA	2	**AUF3D201630**	**10970**
20A	30mA	2	**AUF3D202003**	**9600**
	100mA	2	**AUF3D202010**	**10575**
	300mA	2	**AUF3D202030**	**10970**
25A	30mA	2	**AUF3D202503**	**9600**
	100mA	2	**AUF3D202510**	**10575**
	300mA	2	**AUF3D202530**	**10970**
32A	30mA	2	**AUF3D203203**	**9600**
	100mA	2	**AUF3D203210**	**10575**
	300mA	2	**AUF3D203230**	**10970**
40A	30mA	2	**AUF3D204003**	**9600**
	100mA	2	**AUF3D204010**	**10575**
	300mA	2	**AUF3D204030**	**10970**
63A	30mA	4	**AUF3D206303**	**11315**
	100mA	4	**AUF3D206310**	**11965**
	300mA	4	**AUF3D206330**	**12075**
4P Adi				
16A	30mA	7.5	**AUF3D401603**	**10220**
	100mA	7.5	**AUF3D401610**	**11365**
	300mA	7.5	**AUF3D401630**	**11600**
20A	30mA	7.5	**AUF3D402003**	**10220**
	100mA	7.5	**AUF3D402010**	**11365**
	300mA	7.5	**AUF3D402030**	**11600**
25A	30mA	7.5	**AUF3D402503**	**10220**
	100mA	7.5	**AUF3D402510**	**11365**
	300mA	7.5	**AUF3D402530**	**11600**
32A	30mA	7.5	**AUF3D403203**	**10545**
	100mA	7.5	**AUF3D403210**	**11380**
	300mA	7.5	**AUF3D403230**	**11615**
40A	30mA	7.5	**AUF3D404003**	**10710**
	100mA	7.5	**AUF3D404010**	**11380**
	300mA	7.5	**AUF3D404030**	**11665**
63A	30mA	7.5	**AUF3D406303**	**12830**
	100mA	7.5	**AUF3D406310**	**13090**
	300mA	7.5	**AUF3D406330**	**13090**
80A	30mA	12	**AUF3D408003**	**37895**
	100mA	12	**AUF3D408010**	**38745**
	300mA	12	**AUF3D408030**	**38745**
100A	30mA	12	**AUF3D410003**	**40515**
	100mA	12	**AUF3D410010**	**41485**
	300mA	12	**AUF3D410030**	**41485**

*For technical details, please contact nearest branch office

SPDs (Surge Protection Devices) [8536]



Range Highlights

- Conforms to IEC 61643-11
- Available in Type 2 and Type 1+2
- Type 2 : Protection against indirect lightning and switching surges
  - » Maximum Discharge Current - Imax up to 70kA
- Type 1+2 : Protection against direct and indirect lightning surges
  - » Maximum Discharge Current - Imax up to 100kA

New

800V Solar Application

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage (Uc)	Cat. No.	M.R.P. (₹) Per Unit
Type 2, I_{max} 40kA	3P	4	1500	**AUSP023P40-1500**	**17250**
Type 1+2, I_{imp} 12.5kA	3P	5	1360	**AUSP123P50-1360**	**51750**
Type 1+2, I_{imp} 12.5kA	3P	4	880	**AUSP123P50-880**	**35500**

440V Application (Common + Differential Mode)

Description	I_{max}	Configuration	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Type 1+2, I_{imp} 12.5kA	50kA	1P+N	2	**AUSP121PN50D**	**13750**
		3P+N	4	**AUSP123PN50D**	**26335**
Type 2	40kA	1P+N	1	**AUSP021PN40D**	**8595**
		3P+N	2	**AUSP023PN40D**	**17175**
Type 2	15kA	1P+N	1	**AUSP021PN15D**	**6875**
		3P+N	2	**AUSP023PN15D**	**13525**
Type 1+2, I_{imp} 8kA	100kA	1P+N	2	**AUSP121PN100D**	**12360**
		3P+N	4	**AUSP123PN100D**	**24290**
Type 2	70kA	1P+N	2	**AUSP021PN70D**	**13500**
		3P+N	4	**AUSP023PN70D**	**22485**

SPD Cartridges

Description	Cat. No.	M.R.P. (₹) Per Unit
Cartridge for AUSP021PN15D	**AUSC021PN15D**	**3550**
Cartridge for AUSP021PN40D	**AUSC021PN40D**	**4420**
Cartridge for AUSP021PN70D / AUSP023PN70D	**AUSC021PN70D**	**4725**
Cartridge for AUSP023PN15D#	**AUSC023PN15D**	**4640**
Cartridge for AUSP023PN40D#	**AUSC023PN40D**	**5900**
Cartridge for AUSP121PN100D / AUSP123PN100D	**AUSC121PN100D**	**7080**
Cartridge for AUSP121PN50D / AUSP123PN50D	**AUSC121PN50D**	**7645**
Cartridge for AUSP023PN15D#	**AUSC023PN15DG**	**5390**
Cartridge for AUSP023PN40D#	**AUSC023PN40DG**	**5625**

#For technical details, please contact nearest branch office

ACCL (Automatic Changeover with Current Limiter) [8536]

Single Phase ACCL



Range Highlights

- Conforms to IEC 60947-6, IEC 60947-3
- Wide Range of Current Ratings
  - » (Generator side) - 1A to 30A
  - » (Electricity Board side) - 30A
- RoHS compliant

Description EB/DG	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
30A/1A	4	**AUCL01030001**	**3200**
30A/1.5A	4	**AUCL010301E5**	**3200**
30A/2A	4	**AUCL01030002**	**3200**
30A/2.5A	4	**AUCL010302E5**	**3200**
30A/3A	4	**AUCL01030003**	**3200**
30A/4A	4	**AUCL01030004**	**3200**
30A/5A	4	**AUCL01030005**	**3200**
30A/6A	4	**AUCL01030006**	**3200**
30A/8A	4	**AUCL01030008**	**3200**
30A/10A	4	**AUCL01030010**	**3200**
30A/12A	4	**AUCL01030012**	**3200**
30A/15A	4	**AUCL01030015**	**3200**
30A/20A	4	**AUCL01030020**	**3200**
30A/30A	4	**AUCL01030030***	**3200**

*Non-current limiting variant

Three Phase ACCL



Range Highlights

- Settable overload current limit at DG side
- Separate power consumption monitoring for Mains & Genset
- Settable overvoltage & undervoltage protection
- Settable TPN or SPN mode at DG side
- Protection against single phasing

Description (AC-1) EB/DG	Cat. No.	M.R.P. (₹) Per Unit
32A / 32A	**AUCL03032032**	**22095**
40A / 32A	**AUCL03040032**	**22771**
40A / 40A	**AUCL03040040**	**24645**
50A / 50A	**AUCL03050050**	**35128**
63A / 50A	**AUCL03063050**	**38761**
63A / 63A	**AUCL03063063**	**43907**
80A / 80A	**AUCL03080080**	**66916**
125A / 125A	**AUCL03125125**	**112643**

For 3 Phase ACCL programming video please scan the QR code or click here

Changeover Switches [8536]



Range Highlights

- Conforms to IEC 60947-3 and IS/IEC 60947-3
- Available in 3 positions (I-O-II) with centre off position
- Utilization category AC-22A

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	**AUC00202500**	**2610**
40A	2	**AUC00204000**	**3995**
63A	3	**AUC00206300**	**4645**
Four Pole			
40A	4	**AUC00404000**	**6885**
63A	6	**AUC00406300**	**7805**

Accessories

Accessories [8538]



All Half Module and One Module Accessories are common for AU MCBs, RCCBs and RCBOs

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage	CAT Nos.	M.R.P. (₹) Per Unit
Auxiliary Contact	1NO+1NC	0.5	240V AC, 24V DC	**AUAXAC240**	**1380**
AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	**AUATAC240**	**1615**
HR AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	**AUATAC240HR**	**1615**
Undervoltage Release	-	1	240V AC	**AUUVAC240**	**3260**
	-	1	24V DC	**AUUVDC024**	**3260**
Overvoltage Release	-	1	240V AC	**AUOVAC240**	**4030**
Shunt Release	-	1	240V AC	**AUSRAC240**	**3740**
	-	1	24V DC	**AUSRDC024**	**3740**
Padlock-Suitable for Lock Hasp 3.5 - 5 mm dia. max	Suitable for 1Pole=1Mod devices: RCCBs, RCBOs, Changeover Switches up to 40A			**AUPD01**	**735**
	Suitable for 1Pole-1.5Mod devices: MCBs 80A-125A, Changeover Switch 63A			**AUPD02**	**830**

Note: Standard Pack Quantity for Padlock - 2 Nos.
*For 80A-125A MCBs please contact nearest branch office

Control & Monitoring Devices

Modular Contactors [8536]



Range Highlights

- Wide Range of Current Ratings:
  - » 25A, 40A and 63A
- Conforms to :
  - » IEC 61095, EN 61095
  - » IEC 60947-4-1, EN 60947-4-1
  - » IEC 60947-5-1
- Protection Degree IP 20

Description (AC-1)	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
25A-1NO	1	**AUMC1002501**	**2800**
25A-2NO	1	**AUMC2002501**	**3515**
40A-2NO	3	**AUMC2004003**	**6010**
40A-3NO	3	**AUMC3004003**	**8615**
40A-4NO	3	**AUMC4004003**	**10105**
63A-2NO+2NC	3	**AUMC2206303**	**10680**
63A-3NO	3	**AUMC3006303**	**10945**
63A-4NO	3	**AUMC4006303**	**12050**
Accessory [8538]			
Auxiliary Contact, 2NO	0.5	**AUMCAUX240**	**2620**

Energy Meters [9030]



Range Highlights

- DIN mounting whole current operated meter
- Accuracy Class 1.0
- Inbuilt RS485 option
- **Parameters :** Voltage, Current, kW, kWh, kVA, kVAh, RPM, Load hours, Interruptions


Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Single Phase - 60A	2	**WD401010OOOO**	**3940**
Three Phase - 80A	5	**WD402010OOOO**	**8530**
Single Phase - 60A (RS485)	2	**WD401011OOOO**	**5825**
Three Phase - 80A (RS485)	5	**WD402011OOOO**	**12870**

Indicating Lights [8531]



Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
RED	1	**AUIL01RED00**	**1610**
YELLOW	1	**AUIL01YEL00**	**1610**
BLUE	1	**AUIL01BLU00**	**1610**
GREEN	1	**AUIL01GRE00**	**1610**
RED-YELLOW-BLUE	1	**AUIL01RYB00**	**1960**

Auxiliary & Accessories for Exora MCBs [8538]



Description	Cat. No.	M.R.P. (₹) Per Unit
Auxiliary Contact - 6A , 240V AC, (1NO+1NC), 0.5 Mod	**BZA11006**	**1325**
Shunt Release - 240V AC, 1 Mod	**BZS00240**	**3625**
Trip Alarm Contact - 6A, 240V AC, (1NO+1NC), 0.5 Mod	**BZT11006**	**1545**

Industrial Plugs & Sockets [8536] New

Plugs



Highlights

- Conforms to IEC 60309 -1&2
- Mechanical Impact - IK08
- Ingress Protection - IP44 & IP67
- Fire Resistance - 850°C as per IEC 60695-2-11
- Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Plug - IP44		
16A, 2P+E	**PSKPM30164**	**700**
32A, 2P+E	**PSKPM30324**	**1105**
16A, 3P+E	**PSKPM40164**	**895**
32A, 3P+E	**PSKPM40324**	**1305**
16A, 3P+N+E	**PSKPM50164**	**945**
32A, 3P+N+E	**PSKPM50324**	**1260**
Plug - IP67		
16A, 2P + E	**PSKPM30167**	**1560**
32A, 2P + E	**PSKPM30327**	**2200**
63A, 2P + E	**PSKPM30637**	**6250**
16A, 3P + E	**PSKPM40167**	**1760**
32A, 3P + E	**PSKPM40327**	**2785**
63A, 3P + E	**PSKPM40637**	**5950**
16A, 3P + N + F	**PSKPM50167**	**1885**
32A, 3P + N + E	**PSKPM50327**	**2400**
63A, 3P + N + E	**PSKPM50637**	**5965**
125A, 3P + N + E	**PSKPM51257**	**18215**

Socket



Highlights

- Conforms to IEC 60309 -1&2
- Mechanical Impact - IK08
- Ingress Protection - IP44 & IP67
- Fire Resistance - 850°C as per IEC 60695-211
- Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket - IP44		
16A, 2P+E	**PSKSM30164**	**970**
32A, 2P+E	**PSKSM30324**	**1355**
16A, 3P+E	**PSKSM40164**	**1140**
16A, 3P + N + E	**PSKSM50164**	**1240**
32A, 3P + N + E	**PSKSM50324**	**1660**
Socket - IP67		
16A, 2P+E	**PSKSM30167**	**1830**
32A, 2P+E	**PSKSM30327**	**2515**
63A, 2P+E	**PSKSM30637**	**6800**
16A, 3P+E	**PSKSM40167**	**2295**
63A, 3P+E	**PSKSM40637**	**6865**
16A, 3P + N + E	**PSKSM50167**	**2400**
32A, 3P + N + E	**PSKSM50327**	**2805**
63A, 3P + N + E	**PSKSM50637**	**6975**
125A, 3P + N + E	**PSKSM51257**	**21895**

Socket Angled



Highlights

- Conforms to IEC 60309 -1&2
- Mechanical Impact - IK08
- Ingress Protection - IP44 & IP67
- Fire Resistance - 850°C as per IEC 60695-2-11
- Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Angled - IP44		
16A, 2P+E	**PSKSA30164**	**755**
32A, 2P+E	**PSKSA30324**	**1335**
16A, 3P+E	**PSKSA40164**	**1140**
32A, 3P+E	**PSKSA40324**	**1575**
16A, 3P+N+E	**PSKSA50164**	**1215**
32A, 3P+N+E	**PSKSA50324**	**1540**
Socket Angled - IP67		
16A, 2P+E	**PSKSA30167**	**1440**
32A, 2P+E	**PSKSA30327**	**1875**
63A, 2P+E	**PSKSA30637**	**6140**
32A, 3P+E	**PSKSA40327**	**2785**
63A, 3P+E	**PSKSA40637**	**6150**
32A, 3P+N+E	**PSKSA50327**	**2220**
63A, 3P+N+E	**PSKSA50637**	**6275**
125A, 3P+N+E	**PSKSA51257**	**20820**

Socket Straight



Highlights

- Conforms to IEC 60309 -1&2
- Mechanical Impact - IK08
- Ingress Protection - IP44 & IP67
- Fire Resistance - 850°C as per IEC 60695-2-11
- Easy Screw connection with same orientation Of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Straight- IP44		
16A, 2P+E	**PSKSS30164**	**860**
32A, 2P+E	**PSKSS30324**	**1370**
32A, 3P+N+E	**PSKSS50324**	**1715**
Socket Straight- IP67		
16A, 2P+E	**PSKSS30167**	**1450**
63A, 2P+E	**PSKSS30637**	**7435**
63A, 3P+E	**PSKSS40637**	**6210**
63A, 3P+N+E	**PSKSS50637**	**6210**
125A, 3P+N+E	**PSKSS51257**	**20820**

Lauritz Knudsen
Electrical & Automation

Distribution Board suitable for **Aluminum shuttering (Mivan) Construction**



DBs suitable for Aluminum Shuttering Construction [8537]

SPN DBs

Highlights

- Available in CRCA sheet steel, RAL9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoings

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	2	2	**LTSD04M**	*
6 way	2	4	**LTSD06M**	*
8 way	2	6	**LTSD08M**	*
12 way	2	10	**LTSD12M**	*
16 way	2	14	**LTSD16M**	*

TPN DBs

Highlights

- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bars |neutral bar/s with shroud/s | earth bar/s | sticking saddles | cementspill protector | color-coded interconnecting wire set | cable ties |blanking plates and circuit identification labels
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoings

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	8	4+4+4	**LTTD04M**	*
6 way	8	6+6+6	**LTTD06M**	*
8 way	8	8+8+8	**LTTD08M**	*

*For details, please contact nearest branch office

EXORA.N
Distribution Boards

Lauritz Knudsen
Electrical & Automation

DESIGN OR SAFETY?

OBVIOUSLY BOTH. OBVIOUSLY EXORA.N DB.

#ExoraHaiTohSafeHai



©2026. ALL RIGHTS RESERVED

SPN DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 08-for single door DBs, IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoings




Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 30 - Single Door				
4 way	2	2	**DESPN004SDS**	**2175**
6 way	2	4	**DESPN006SDS**	**2275**
8 way	2	6	**DESPN008SDS**	**2620**
12 way	2	10	**DESPN012SDS**	**3110**
16 way	2	14	**DESPN016SDS**	**3810**
18 way	2	16	**DESPN018SDS**	**4430**
IP 43 - Metal Door				
4 way	2	2	**DESPN004DDS**	**2815**
6 way	2	4	**DESPN006DDS**	**3245**
8 way	2	6	**DESPN008DDS**	**3435**
12 way	2	10	**DESPN012DDS**	**4125**
16 way	2	14	**DESPN016DDS**	**5265**
18 way	2	16	**DESPN018DDS**	**5515**
IP 43 - Glazed Door				
4 way	2	2	**DESPN004GDS**	**3770**
6 way	2	4	**DESPN006GDS**	**4010**
8 way	2	6	**DESPN008GDS**	**4360**
12 way	2	10	**DESPN012GDS**	**5310**
16 way	2	14	**DESPN016GDS**	**6595**
18 way	2	16	**DESPN018GDS**	**6975**
IP 54 - Metal Door				
4 way	2	2	**DESPN00454S**	**9915**
6 way	2	4	**DESPN00654S**	**11055**
8 way	2	6	**DESPN00854S**	**11755**
12 way	2	10	**DESPN01254S**	**13500**
16 way	2	14	**DESPN01654S**	**15030**
18 way	2	16	**DESPN01854S**	**15365**

TPN DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 08-for single door DBs, IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bars |neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SPMCBs as outgoings

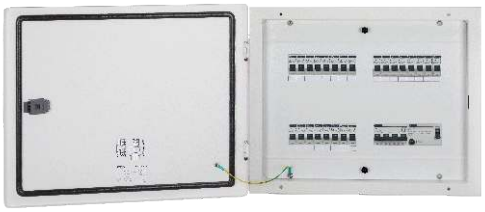

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 30 - Single Door				
4 way	4	4+4+4	**DETPE004SDS**	**5630**
6 way	4	6+6+6	**DETPE006SDS**	**6910**
4 way	8	4+4+4	**DETPN004SDS**	**5925**
6 way	8	6+6+6	**DETPN006SDS**	**7340**
8 way	8	8+8+8	**DETPN008SDS**	**8655**
12 way	8	12+12+12	**DETPN012SDS**	**12475**
16 way	8	16+16+16	**DETPN016SDS**	**15210**
IP 43 - Metal Door				
4 way	4	4+4+4	**DETPE004DDS**	**6615**
6 way	4	6+6+6	**DETPE006DDS**	**8220**
4 way	8	4+4+4	**DETPN004DDS**	**6855**
6 way	8	6+6+6	**DETPN006DDS**	**8540**
8 way	8	8+8+8	**DETPN008DDS**	**10300**
12 way	8	12+12+12	**DETPN012DDS**	**15430**
16 way	8	16+16+16	**DETPN016DDS**	**19150**
IP 43 - Glazed Door				
4 way	4	4+4+4	**DETPE004GDS**	**8985**
6 way	4	6+6+6	**DETPE006GDS**	**10800**
4 way	8	4+4+4	**DETPN004GDS**	**9350**
6 way	8	6+6+6	**DETPN006GDS**	**11380**
8 way	8	8+8+8	**DETPN008GDS**	**13495**
12 way	8	12+12+12	**DETPN012GDS**	**20700**
16 way	8	16+16+16	**DETPN016GDS**	**24880**
IP 54 - Metal Door				
4 way	4	4+4+4	**DETPE00454S**	**22445**
6 way	4	6+6+6	**DETPE00654S**	**26230**
4 way	8	4+4+4	**DETPN00454S**	**23720**
6 way	8	6+6+6	**DETPN00654S**	**28565**
8 way	8	8+8+8	**DETPN00854S**	**31225**
12 way	8	12+12+12	**DETPN01254S**	**44015**
16 way	8	16+16+16	**DETPN01654S**	**52820**

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

PPI DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door DBs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for FP MCB / Isolator / RCCB / RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoings



IP 43 - Metal Door

Horizontal PPI DBs

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	2+2+2	4+4+4	**DEHPI004DD**	**12305**
6 way	8	2+2+2	6+6+6	**DEHPI006DD**	**14570**
8 way	8	2+2+2	8+8+8	**DEHPI008DD**	**17470**
12 way	8	2+2+2	12+12+12	**DEHPI012DD**	**24075**
16 way	8	2+2+2	16+16+16	**DEHPI016DD**	**28885**



Tier PPI DBs

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
6 way	8	2+2+2	6+6+6	**DETPI006DD**	**15080**
8 way	8	2+2+2	8+8+8	**DETPI008DD**	**18905**
10 way	8	2+2+2	10+10+10	**DETPI010DD**	**19815**
12 way	8	2+2+2	12+12+12	**DETPI012DD**	**20995**
16 way	8	2+2+2	16+16+16	**DETPI016DD**	**23935**
12 way	MCCB*	2+2+2	12+12+12	**DETPL012DD**	**22455**

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

TPN Phase Segregated DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door DBs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for
  - » Modular Incomer - FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoings
  - » MCCB Incomer - MCCB* as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoings



With Modular Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	4+4+4	4+4+4	**DEPSG004DD**	**18070**
6 way	8	4+4+4	6+6+6	**DEPSG006DD**	**20375**
8 way	8	4+4+4	8+8+8	**DEPSG008DD**	**22735**
12 way	8	4+4+4	12+12+12	**DEPSG012DD**	**28205**



With MCCB Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	MCCB	4+4+4	4+4+4	**DEPGL004DD**	**24860**
6 way	MCCB	4+4+4	6+6+6	**DEPGL006DD**	**28425**
8 way	MCCB	4+4+4	8+8+8	**DEPGL008DD**	**32875**
12 way	MCCB	4+4+4	12+12+12	**DEPGL012DD**	**37075**

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Vertical TPN DB with MCCB Incomer [8537]

New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for 3 pole and 4 Pole MCCB* as incomer and SP/TP MCBs as outgoings



Up to 125A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	**DEVTL004DD**	**20550**
6 way	MCCB	6+6+6	**DEVTL006DD**	**23355**
8 way	MCCB	8+8+8	**DEVTL008DD**	**25710**
12 way	MCCB	12+12+12	**DEVTL012DD**	**34980**
16 way	MCCB	16+16+16	**DEVTL016DD**	**42115**
IP 54 - Metal Door				
4 way	MCCB	4+4+4	**DEVTL00454**	**42960**
6 way	MCCB	6+6+6	**DEVTL00654**	**48990**
8 way	MCCB	8+8+8	**DEVTL00854**	**53035**

*Suitable for 3 Pole & 4 Pole DZ0 MCCB as incomer.
In case of any other MCCB frame requirement please contact nearest branch.

Vertical TPN DB with Modular Incomer [8537]

New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/ TP MCBs as outgoings



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	**DEVTM004DD**	**17375**
6 way	8	6+6+6	**DEVTM006DD**	**19355**
8 way	8	8+8+8	**DEVTM008DD**	**22470**
12 way	8	12+12+12	**DEVTM012DD**	**30590**
16 way	8	16+16+16	**DEVTM016DD**	**36500**
IP 54 - Metal Door				
4 way	8	4+4+4	**DEVTM00454**	**37075**
6 way	8	6+6+6	**DEVTM00654**	**40445**
8 way	8	8+8+8	**DEVTM00854**	**44665**

Vertical TPN DB with MCCB Incomer [8537]

New



Up to 250A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	**DEVTH004DD**	**26825**
6 way	MCCB	6+6+6	**DEVTH006DD**	**30040**
8 way	MCCB	8+8+8	**DEVTH008DD**	**33040**
12 way	MCCB	12+12+12	**DEVTH012DD**	**39985**
16 way	MCCB	16+16+16	**DEVTH016DD**	**53735**
IP 54 - Metal Door				
4 way	MCCB	4+4+4	**DEVTH00454**	**49080**
6 way	MCCB	6+6+6	**DEVTH00654**	**53585**
8 way	MCCB	8+8+8	**DEVTH00854**	**55420**

*Suitable for 3 pole and 4 pole DU250, DU250C & DN1 MCCB as incomer

Flexi/Row DB [8537]

New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | cable ties | circuit identification labels
- With provision to mount modular devices as per requirement



Description	No. of Modules Per Row	Cat. Nos.	M.R.P. (₹) Per Unit
IP 43 - Metal Door			
2 Row 28 Module	14	**DEROW228DD**	**8810**
3 Row 42 Module	14	**DEROW342DD**	**10560**
4 Row 56 Module	14	**DEROW456DD**	**11480**
4 Row 64 Module	16	**DEROW464DD**	**13355**

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

TPN Phase Selector DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door Dbs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 3 nos. of 63A E&A rotary switches | 3 nos. of rocker switches for phase identification | 100A insulated phase bus-bars | neutral bar/s with shroud/s | set | earth bar/s | sticking saddles | color-coded interconnecting wire cable ties | blanking plates and circuit identification labels
- With provision for - FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoings



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	**DEPSR004DD**	**21560**
6 way	8	6+6+6	**DEPSR006DD**	**21905**
8 way	8	8+8+8	**DEPSR008DD**	**23465**
10 way	8	10+10+10	**DEPSR010DD**	**25315**
12 way	8	12+12+12	**DEPSR012DD**	**26690**

EV charging DB 8537] New



Highlights

- Engineered specifically Charging application - 3.3 kW
- Robust earth leakage, short circuit and overload protection with RCBO-
- Factory fitted RCBO, switch and socket

Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
2 way EVDB	**2**	**DEEVC002LD**	*
4 way EVDB	**4**	**DEEVC004LD**	*

*For details, please contact nearest branch office

Enclosure [8537] New



Highlights

- Conforms to IEC 61439-1 & 3
- Suitable for Surface and Flush mounting
- Available in CRCA sheet steel, RAL9003, powder coated
- With provision to mount MCB/Isolator/RCCB/RCBO and other modular devices

IP 30 - Metal Door

Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
IP 30 - Metal Door			
2 way	2	**DEENC002SD**	**1095**
3 way	3	**DEENC003SD**	**1095**
4 way	4	**DEENC004SD**	**1095**
6 way	6	**DEENC006SD**	**1700**

Plug & Socket DB [8537] New

Highlights

- Conforms to IEC 61439-1 & 3
- Suitable for Surface and Flush mounting
- Available in CRCA sheet steel, RAL9003, powder coated
- Loose Metal Plugs & Sockets conforms to IS 8804; available in Single Phase & Three Phase



Metal Plug & Socket



Plastic Plug & Socket

Description	No. of Pins	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
Metal Plug & Sockets				
10 A, 2 Pin + SC^	P + N	1	**DEMPS110SD**	**2725**
20 A, 2 Pin + SC^	P + N	1	**DEMPS120SD**	**2930**
20 A, 2 Pin + SC^	P + N	2	**DEMPS220SD**	**3175**
20 A, 3 Pin + SC^	3P	3	**DEMPS320SD**	**5380**
32 A, 3 Pin + SC^	3P	3	**DEMPS332SD**	**6370**
32 A, 3 Pin + SC^	3P	4	**DEMPS432SD**	**6775**
63 A, 5 Pin + SC^	3P+N+E	4	**DEMPS463SD**	**22955**
Plastic Plug & Sockets				
16 A, 3 Pin	P+N+E	2	**DEPPS316SD**	**4455**
32 A, 3 Pin	P+N+E	4	**DEPPS332SD**	**4805**
32 A, 5 Pin	3P+N+E	8	**DEPPS532SD**	**8025**
63 A, 5 Pin	3P+N+E	8	**DEPPS563SD**	**20120**

Metal Plug [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC^	P + N	**MPS210P**	**335**
20 A, 2 Pin + SC^	P + N	**MPS220P**	**355**
20 A, 3 Pin + SC^	3P	**MPS320P**	**475**
32 A, 3 Pin + SC^	3P	**MPS332P**	**900**

Note: Standard pack quantity - 20 nos.

Metal Socket [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC^	P + N	**MPS210S**	**350**
20 A, 2 Pin + SC^	P + N	**MPS220S**	**390**
20 A, 3 Pin + SC^	3P	**MPS320S**	**530**
32 A, 3 Pin + SC^	3P	**MPS332S**	**900**

^ SC-Scraping Earth

Note: Standard pack quantity - 20 nos.

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

DBs with provision for TV / Telephone splitters [8537]

New

Highlights

- Distribution Boards equipped with provisions to mount TV / Telephone splitters
- Available in SPN & TPN Dbs
- Communication DB equipped with provisions to mount 2 ONT, Spike guard, Data switch, TV / Telephone splitters



TV / Telephone



Communication DB

DB Type	Description	No. of Modules Incomer	No. of Modules Outgoing	Cat. Nos.	M.R.P. (₹) Per Unit
IP 43 - Metal Door					
SPN	6 way	2	4	**DESPN006DDTV**	**6125**
	8 way	2	6	**DESPN008DDTV**	**6590**
	12 way	2	10	**DESPN012DDTV**	**8105**
	16 way	2	14	**DESPN016DDTV**	**9410**
	18 way	2	16	**DESPN018DDTV**	**11125**
TPN	4 way	8	4+4+4	**DETPN004DDTV**	**12045**
	6 way	8	6+6+6	**DETPN006DDTV**	**13920**
	8 way	8	8+8+8	**DETPN008DDTV**	**16590**
Communication DB				**DECOM01DD**	*

*For details, please contact nearest branch office

Cable End Boxes [8537]

Highlights

- Available in CRCA sheet steel, RAL9003, powder coated
- Can be either at the top or bottom of the distribution board

Description	Cat. Nos.	M.R.P. (₹) Per Unit
CEB for SPN DBs		
CEB-SPN Double Door, 4 way	**DESPN004CBS**	**1200**
CEB-SPN Double Door, 6 way	**DESPN006CBS**	**1295**
CEB-SPN Double Door, 8 way	**DESPN008CBS**	**1450**
CEB-SPN Double Door, 12 way	**DESPN012CBS**	**1610**
CEB-SPN Double Door, 16 way	**DESPN016CBS**	**2270**
CEB-SPN Double Door, 18 way	**DESPN018CBS**	**2340**
CEB for TPN DBs		
CEB-TPE Double Door, 4 way	**DETPE004CBS**	**1555**
CEB-TPE Double Door, 6 way	**DETPE006CBS**	**2215**
CEB-TPN Double Door, 4 way	**DETPN004CBS**	**1630**
CEB-TPN Double Door, 6 way	**DETPN006CBS**	**2285**
CEB-TPN Double Door, 8 way	**DETPN008CBS**	**2870**
CEB-TPN Double Door, 12 way	**DETPN012CBS**	**4780**
CEB-TPN Double Door, 16 way	**DETPN016CBS**	**4825**
CEB for Horizontal PPI DBs		
CEB-Horz. PPI Double Door, 4 way	**DEHPI004CB**	**2410**
CEB-Horz. PPI Double Door, 6 way	**DEHPI006CB**	**3010**
CEB-Horz. PPI Double Door, 8 way	**DEHPI008CB**	**3775**
CEB-Horz. PPI Double Door, 12 way	**DEHPI012CB**	**4735**
CEB-Horz. PPI Double Door, 16 way	**DEHPI016CB**	**5150**
CEB for VTPN DBs		
CEB-VTPN Double Door, Modular Incomer	**DEVTMXXXCB**	**1610**
CEB-VTPN Double Door, MCCB Incomer	**DEVTXXXXCB**	**5690**
CEB for Phase Segregated DBs		
CEB-PSG Double Door, 4 way	**DEPSG004CB**	**4225**
CEB-PSG Double Door, 6 way	**DEPSG006CB**	**5035**
CEB-PSG Double Door, 8 way	**DEPSG008CB**	**5560**
CEB-PSG Double Door, 12 way	**DEPSG012CB**	**6190**

DB Accessories

Busbar - Fork Type [8538]



Highlights

- Available in Single Pole, Double Pole, Three Pole and Four Pole versions
- Material : Copper

Description	Cat. Nos..	M.R.P. (₹) Per Unit	Std. Pack Qty.
SP 13 Mod	**BSP13**	**535**	5
SP 56 Mod	**BSP56**	**2200**	5
DP 12 Mod	**BDP12**	**955**	5
TP 12 Mod	**BTP12**	**1035**	5
FP 12 Mod	**BFP12**	**2040**	5
End Caps for SP	**ECP01**	**35**	10
End Caps for DP/TP	**ECP03**	**75**	10
End Caps for FP	**ECP04**	**120**	10



Blanking Plates [8538]

Highlights

- Available in One module and Half module

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std.Pack Qty.
One Module	**BKP10**	**35**	10
Half Module	**BKP05**	**35**	10



PDK02

Padlock [8301]

Highlights

- Version with standard lock and a common key

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std. Pack Qty.
Lock and Key Kit	**PDK02**	**935**	5

For ordering old DBs, replace Cat no with "DB" instead of "DE".
Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- Regular Maintenance
- Preventive Maintenance Programme
- On Call
- Annual Maintenance Contract
- Product Support for Managing Obsolescence-

Please visit www.LK-EA.com for latest update on our products & prices.

Switchgear Training Centres



Pune
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com



Lucknow
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com



Delhi
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com



Kolkata
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com



Vadodara
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com



Coonor
Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonoor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022 6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com

Lauritz Knudsen
Electrical & Automation

Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.
Tel: 022-6722 6300 | **Fax:** 022-6705 1112 | **e-mail:** CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Work loop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar - 751 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
801 Word Level-8, No. 28,
SIDCO Industrial Estate, Guindy,
Chennai - 600 032
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Mava Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titaanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballupur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurisupally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, Samarth House,
Opposite Titan World,
Samarth Nagar, Mahatma Nagar,
Nasik - 422 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Qubexpro Business Centre,
4th Floor, V Mall, Above Lifestyles,
Facor Layout, Waltair Uplands,
Visakhapatnam - 530 003
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporative Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone no: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.

Lauritz Knudsen
Electrical & Automation

Lauritz Knudsen Electrical & Automation, Electrical Standard Product
A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022-6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com

Sri Laxmi Agencies
Old Bhoiguda,
4-3-57/1, 1st Floor
Secunderabad 500003, Telangana
India
Phone No - 04027712427
Email - srilaxmiagencies1995@gmail.com

SP 50494 AC